



# Aristocrat > Wave > Nautica





# Aristocrat > Wave > Nautica

## TIMELESS DESIGN FOR EACH KITCHEN AND BATHROOM

Cosy warmth in a special edition. Beautifully designed to suit classic and modern interiors, with circular collectors positioned behind slim, attractive rails. Nautica and Wave are available in all Jaga colours. The stunning stainless steel Aristocrat represents the peak of luxury, and is available in a polished and elegantly brushed satin finish.

## COLOURS


**Aristocrat:**  
gloss polished or brushed satin stainless steel

**Nautica & Wave:**  
Standard colours without surcharge:  
› white (233) RAL 9016 glossy  
› white (201) RAL 9010 glossy  
› sandblast grey metallic 001

Other colours: see colour chart


## DIMENSIONS

**ARIW**  
Aristocrat Wall




**NAUW**  
Nautica Wall

**WAVW**  
Wave Wall

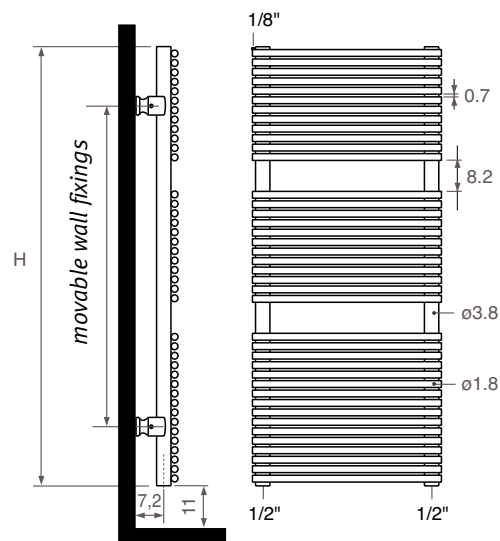

## CONNECTIONS



### STANDARD CONNECTION:


Code 18  
connection 18 or 81.

### ONE PIPE CONNECTION:

Ordering code: specify code 11 or 88 instead of 18.  
In case of one pipe connection always use a diffusion tube of min. length of 100 mm (Ø 10 up to 12 mm) with a reduction washer. With an one pipe connection the radiator will heat up less quickly.

### WITH ELECTRIC ELEMENT:


Standard code 18, and order an electric element.



## MIXED:

Standard code 18. Order an electric element and T-pieces.

- › Fit the T-pieces together with the electrical heating element for connection to the central heating wet system.
- › Never isolate the radiator from the expansion system, in other words NEVER cut off the return of the radiator.



Not standard connections without surcharge



# Product descriptions > Aristocrat > Wave > Nautica

## ARISTOCRAT/WAVE/NAUTICA

### MATERIAL

The radiators are composed out of steel vertical collectors and horizontal straight steel radiation tubes. The Aristocrat of high quality stainless steel. The radiation tubes are by means of the “resistance welding” procedure connected with the collectors. No welding seams are visible either at the collector nor at the radiation tubes.

An electric element can be installed.

For [central heating wet system](#) / [electric only](#) / [mixed application \(mixed\)](#).

- > pressure test: 10,3 bar
- > working pressure: 8 bar

### COMPOSITION

Single, round radiation tubes (Ø 18 x 1.5 mm) welded horizontal at the vertical round collector (Ø 38 x 1.5 mm), with a distance of 18 mm.

With on a regular distance open spaces to dry towels or linen.

### COLOUR

The Aristocrat is available in two versions: [gloss polished](#) / [brushed satin](#) stainless steel.

The Wave and Nautica are lacquered in the colour [sandblast grey metallic 001](#) / [white \(RAL 9010\)](#) / [white \(RAL 9016\)](#) / [other \(see colour chart\)](#)

### CONNECTION

The settled sockets 1/2” at the bottom end of the collectors. Air vent 1/8” at the side end of the collector.

Output in watts, measured in accordance with EN 442.

### HOW TO INSTALL

The building services engineer chooses the radiators considering following conditions:

- > A heat output calculation according to the standard.
- > The heat output and the dimensions of the radiators according to EN 442.
- > The radiators may be wall mounted when using the wall fixings supplied.
- > The specially designed [thermostatic connection sets](#) / [thermostatic Jaga Deco](#) / [Jaga-Pro valves](#) / [manual Jaga Deco valves](#) can be connected to [plastic central heating service pipes](#) / [RPE/ALU. tube](#) / [copper tube](#) / [steel pipe](#).
- > [Jaga thermostatic heads](#) / [Jaga Deco thermostatic heads chrome](#) / [Jaga Deco thermostatic heads chrome/white](#) / [Jaga Comap thermostatic heads silver](#) / [not to be](#) / [to be fitted](#).

### OPTIONS

- > Jaga Deco valves.
- > Electric heating element.
- > Electric heating element with infrared operation.
- > T-pieces for mixed application.
- > Insert pipe for top end connection.

