



jaga


Energy  
SAVERS  
LOW-H<sub>2</sub>O


GUARANTEE  
30  
YEAR  
HEAT EXCHANGER

**PLAY**

Playful warmth,  
colourful comfort

www.  
THE RADIATOR FACTORY  
.COM



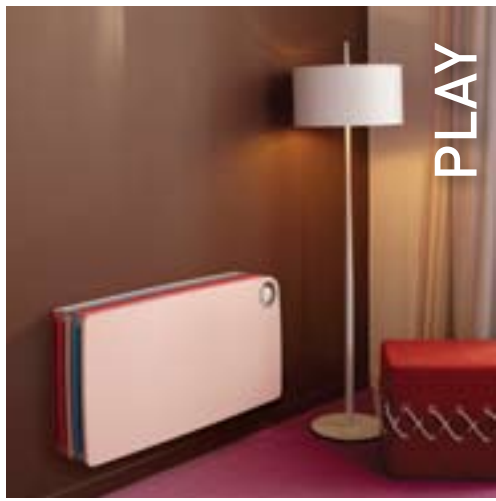

## PLAYFUL WARMTH, COLOURFUL COMFORT


You'd almost think it wasn't possible: so much colour in one radiator. The four-colour Play-4Girls or Play4Boys radiators add a playful touch to any room. Whether you prefer 'clean white' or stylish black, the warm feeling remains!

### Play it Safe


Play only provides safe warmth. Its low surface temperature and wooden cabinet with rounded corners meet the strictest safety standards.

The Play adds a nice touch to any home, as well as in a wide range of public buildings, hospitals, day-cares, schools, etc. Whenever a lot of people come together, safety and enjoyment are both essential.

### DIMENSIONS

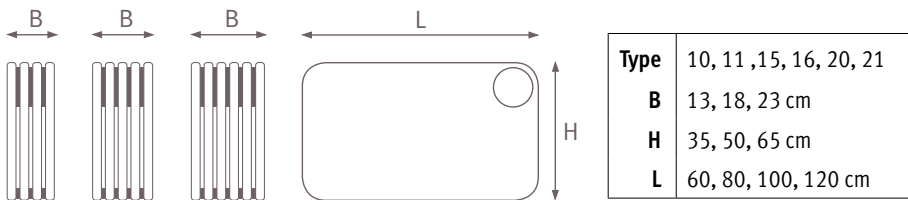

### COLOURS

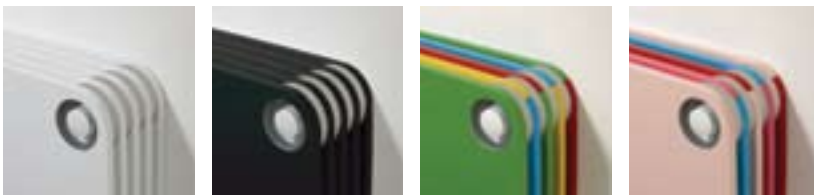

White

Black

Play4Boy

Play4Girl

### OPTIONS

- DBE
- Base grille
- Pencil-proof grille

## THE MOST POWERFUL HEAT EMITTERS



### Significant energy savings

The most efficient and modern heat exchanger that complies with actual AND future building standards and technologies.

### For all low temperature hydronic systems

Perfectly suited for condensing boilers, heat pumps and solar systems.


**The perfect partner for radiant heating** for improved temperature control and energy efficiency.

Brass collectors with 1/2" connections

With dirt-repellent and dust-proof lacquer in graphite grey

Up to 16 parallel copper tubes for the best heat emission

180 Corrugated aluminium fins per meter for super heat-output at low water temperatures

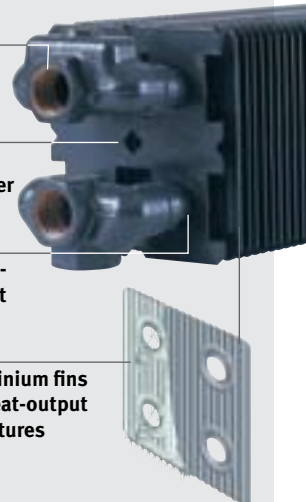

27200.71270003 - 0209 - Jaga N.V.



Jaga International - Verbindingslaan z/n - B-3590 Diepenbeek - T: +32 11 29 41 16 - F: +32 11 29 41 60 - export@jaga.be  
www.theradiatorfactory.com - www.jagaexperienclab.com

# PLAY

NEW



## STANDARD DELIVERY

- Low-H<sub>2</sub>O heat exchanger with pre-mounted brackets
- one piece casing, completely mounted, consisting of lacquered MDF panels with anodised aluminium spacer rings
- suitable for connection left or right below, either to the wall or to the floor.
- pencil-proof grille
- air vent 1/8" and drain cock 1/2"
- **delivery with DBE: DBE system incl. operation, control and power supply 12 VDC. Supplied in separate packaging (add/DBE to ordering code)**

## OPTIONS

- integrated control and connection sets: see page 90-91



CREATE YOUR OWN COLOURS OR CREATE YOUR OWN PRINT!  
FOR MORE INFORMATION GO TO:  
[WWW.THERADIATORFACTORY.COM/CREATEYOUROWN](http://WWW.THERADIATORFACTORY.COM/CREATEYOUROWN)

### CATEGORY 1

### CATEGORY 2



**WHI** Play White



**BLA** Play Black



**PIA** Play Piano




**BOY** Play4Boy



**GIR** Play4Girl

## DIMENSIONS (in cm)

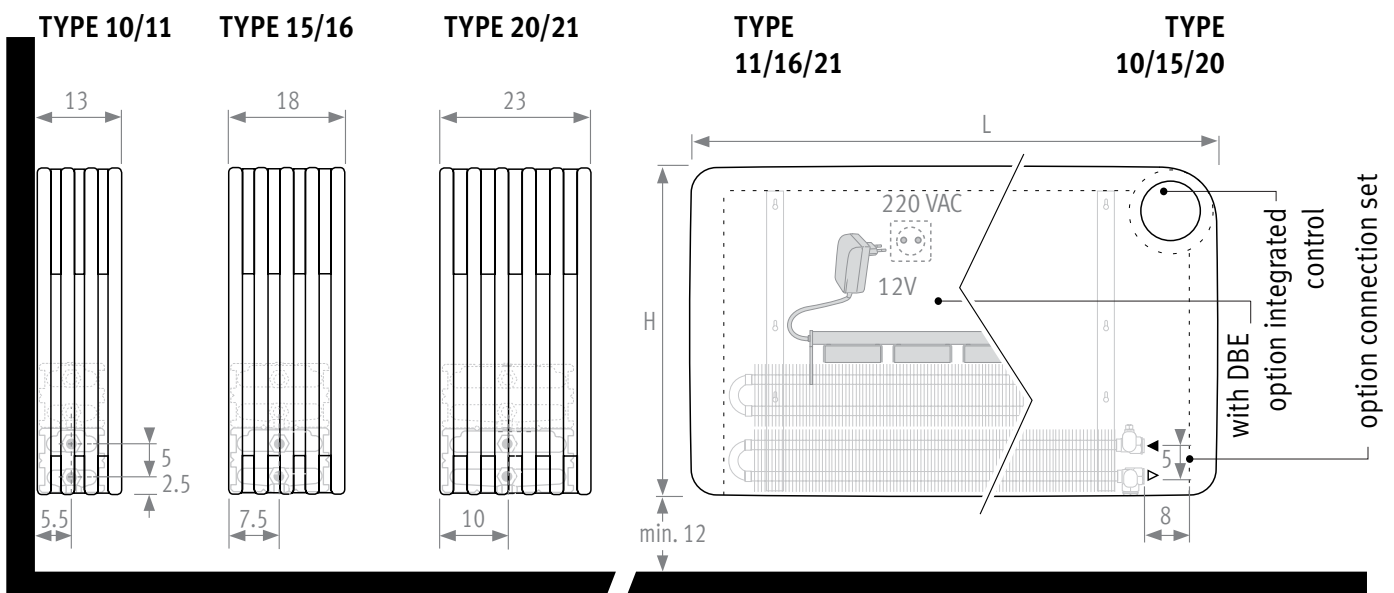

# MOST WANTED

ORDERING CODE: PLAW. code 035 height 060 length 10. type XXX colour /L  
fill in colour code  
Left or Right

		STANDARD			TWIN			WITH DBE						
H	L	Type	watts	watts	watts	Type	watts	watts	watts	Type	watts	watts	watts	watts
			90/70	75/65	55/45		90/70	75/65	55/45		90/70	75/65	55/45	35/30
035	060	10	680	529	262	11	758	583	279	---	---	---	---	---
		15	1033	805	400	16	1135	870	413	---	---	---	---	---
		20	1415	1104	551	21	1593	1217	573	---	---	---	---	---
	080	10	907	705	349	11	1010	777	372	11	1292	1077	646	269
		15	1379	1074	533	16	1514	1160	551	16	1968	1640	984	410
		20	1886	1472	735	21	2123	1622	763	21	2522	2102	1261	526
	100	10	1133	881	436	11	1263	971	465	11	1525	1271	763	318
		15	1723	1342	667	16	1892	1450	688	16	2316	1930	1158	483
		20	2358	1840	919	21	2654	2028	954	21	3010	2508	1505	627
	120	10	1359	1057	523	11	1515	1165	558	11	2118	1765	1059	441
		15	2067	1610	800	16	2270	1740	826	16	3240	2700	1620	675
		20	2829	2208	1102	21	3186	2434	1145	21	4073	3394	2036	849
050	060	10	762	591	290	11	892	685	327	---	---	---	---	---
		15	1190	925	456	16	1357	1040	493	---	---	---	---	---
		20	1649	1284	637	21	1910	1461	689	---	---	---	---	---
	080	10	1016	788	386	11	1189	913	436	11	1456	1213	728	303
		15	1588	1234	609	16	1809	1386	657	16	2239	1866	1120	467
		20	2199	1712	849	21	2547	1948	919	21	2914	2428	1457	607
	100	10	1270	985	483	11	1486	1141	544	11	1729	1441	865	360
		15	1985	1542	760	16	2262	1733	822	16	2656	2213	1328	553
		20	2748	2140	1062	21	3184	2435	1149	21	3498	2915	1749	729
	120	10	1525	1182	579	11	1783	1369	653	11	2363	1969	1181	492
		15	2381	1850	912	16	2714	2080	987	16	3648	3040	1824	760
		20	3298	2568	1274	21	3821	2922	1378	21	4658	3882	2329	971
065	060	10	845	653	317	11	1015	778	369	---	---	---	---	---
		15	1342	1040	509	16	1550	1187	562	---	---	---	---	---
		20	1871	1454	717	21	2173	1663	786	---	---	---	---	---
	080	10	1126	870	423	11	1353	1037	492	11	1604	1337	802	334
		15	1788	1386	679	16	2065	1582	750	16	2474	2062	1237	516
		20	2494	1938	956	21	2898	2218	1049	21	3238	2698	1619	675
	100	10	1408	1088	529	11	1691	1296	615	11	1915	1596	958	399
		15	2236	1733	849	16	2582	1978	937	16	2950	2458	1475	615
		20	3118	2423	1195	21	3621	2772	1311	21	3902	3252	1951	813
	120	10	1690	1306	635	11	2029	1555	738	11	2586	2155	1293	539
		15	2684	2080	1018	16	3099	2374	1125	16	4001	3334	2000	834
		20	3743	2908	1434	21	4345	3326	1573	21	5143	4286	2572	1072

Types 11, 16 and 21 provide even greater power and/or higher exhausting temperature  
 Other dimensions: see [www.theradiatorfactory.com](http://www.theradiatorfactory.com)