




Panel Plus Skirting model

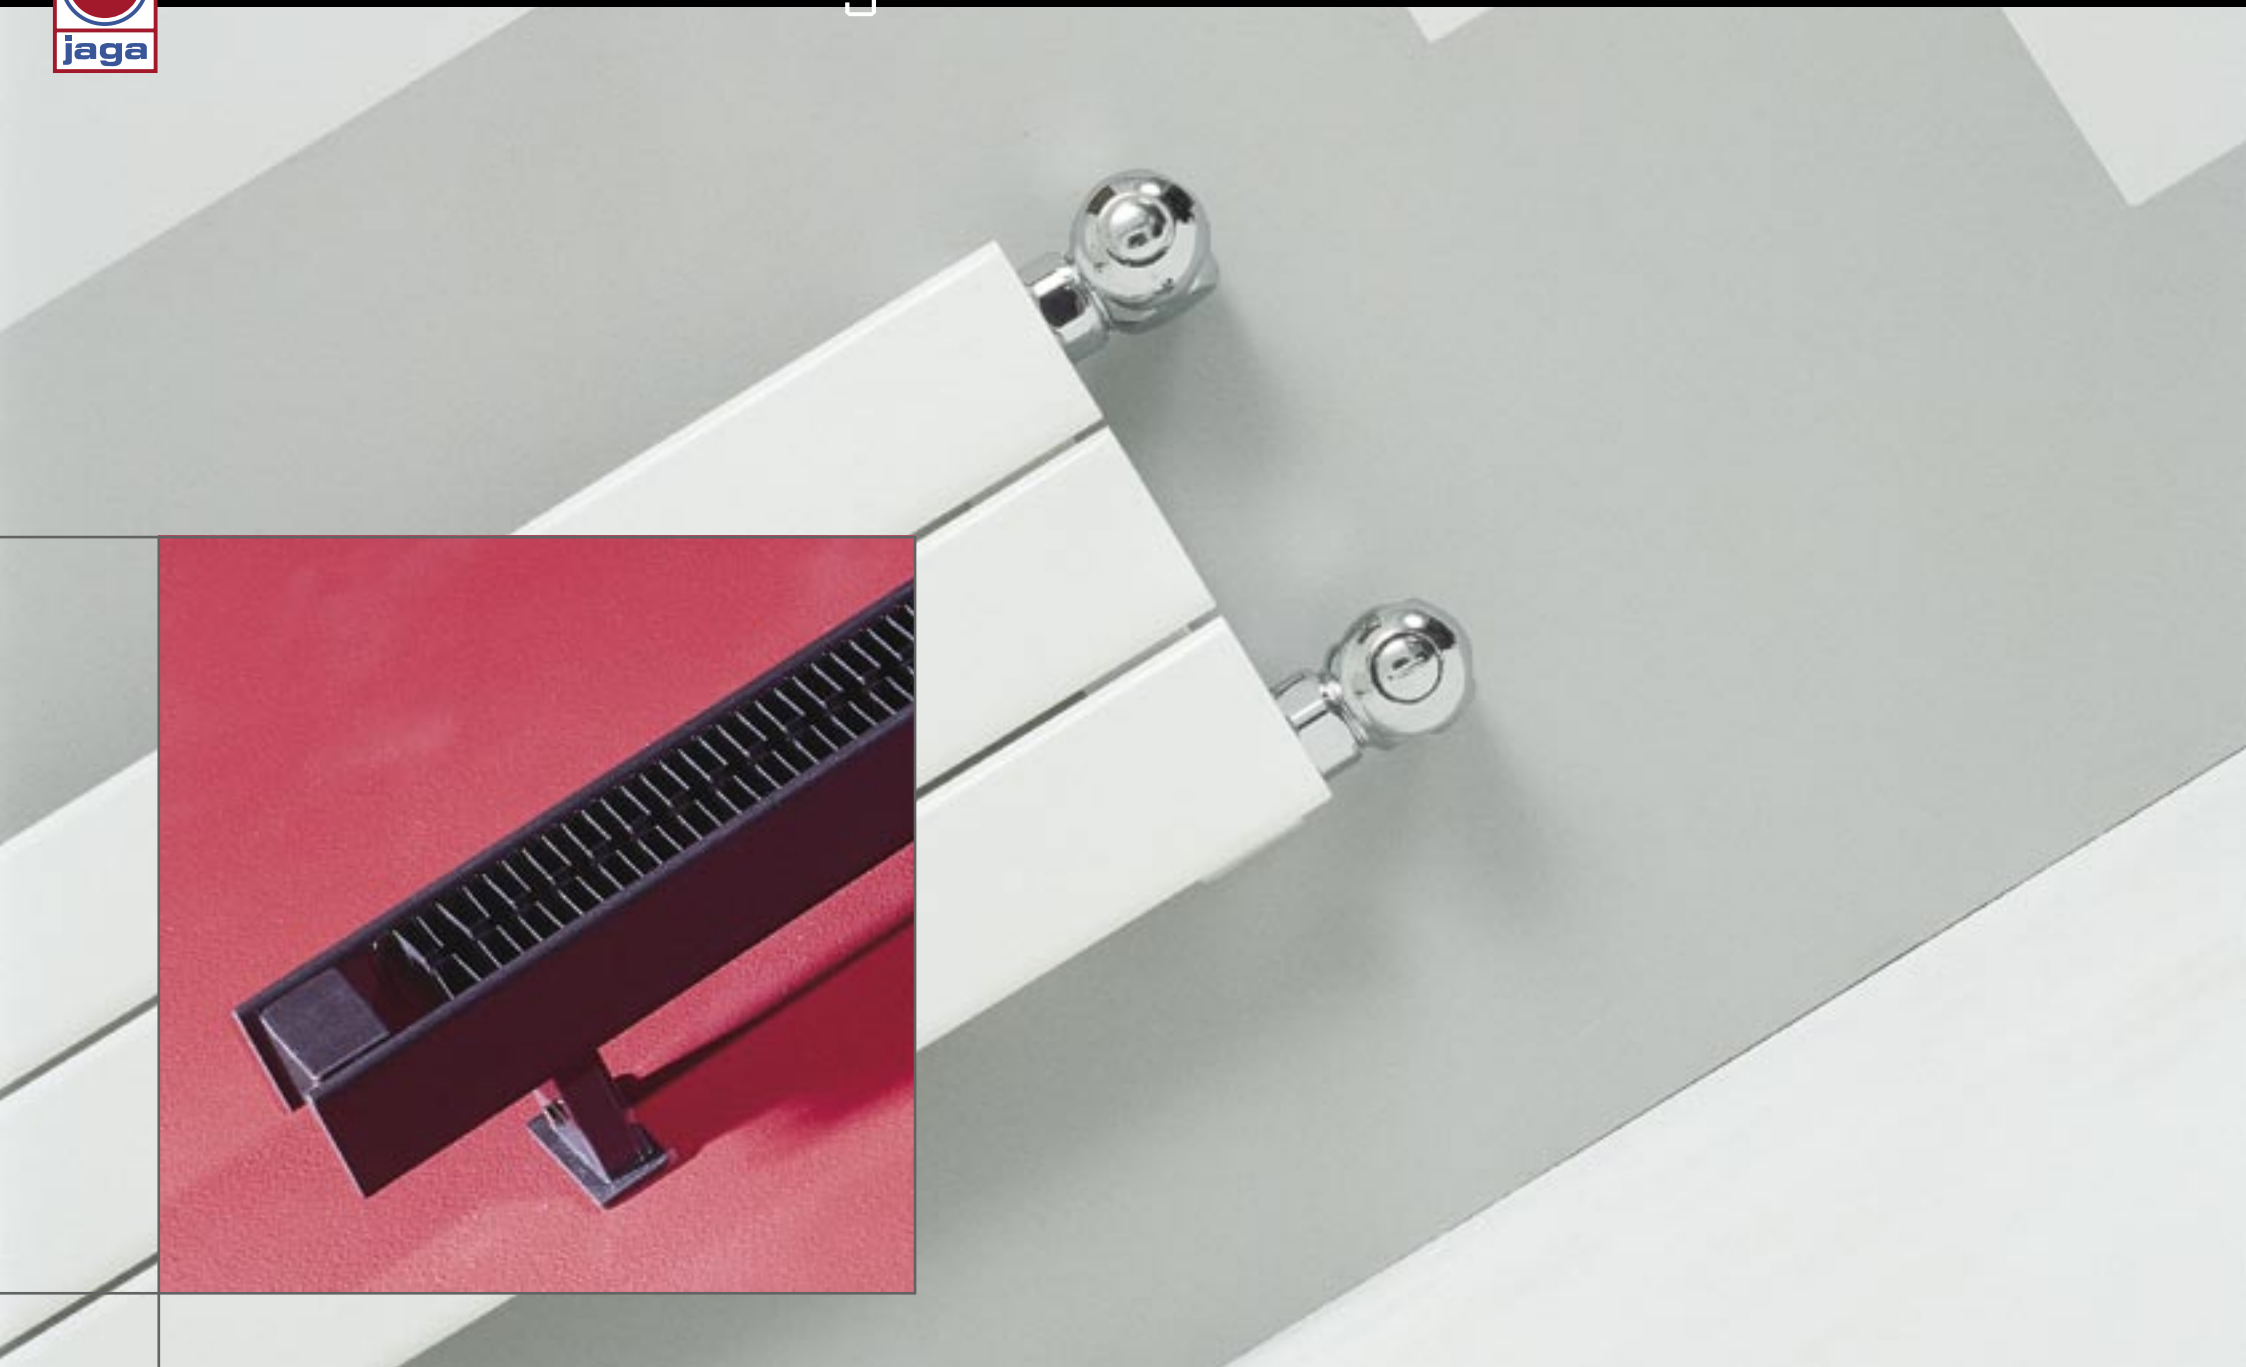

THE SUPER-COMPACT PANEL PLUS FOR FLOOR-TO-CEILING GLASS WALLS

The skirting version is ideal for placement by floor-to-ceiling glass walls with only 6 cm in height.

In free-standing version for floor-to-ceiling glass walls or as wall mounted model.

High heat output provides a comfortable feeling of warmth and protect against cold radiation of large windows.

COLOURS


Standard colours:

- > white (233) RAL 9016 glossy
- > white (201) RAL 9010 glossy
- > sandblast grey metallic (001)

Other colours: see colour chart

CONNECTIONS

Code: 1^o number = flow
2^o number = return

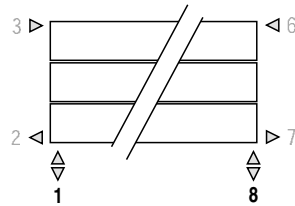

STANDARD CONNECTION

Code 18

Connection 18 or 81

SIDE END CONNECTION

(from H 12 cm)

One-sided:

code 32 or 67 instead of 18

Cross-over:

code 37 or 62 instead of 18

ONE PIPE CONNECTION

(from H 12 cm)

Ordering code: specify code 11 (left) or 88 (right) instead of 18.




Always use a vertical diffusion tube (ø 10 to 12mm) of min. length of 100mm and a reduction washer.

DIMENSIONS

PPHW




Panel Plus Horizontal Wall

TYPE 10

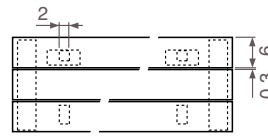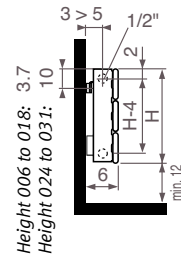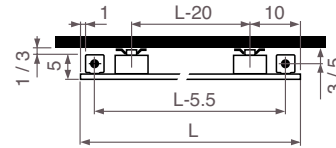

- standard connection
- variant




TYPE 11

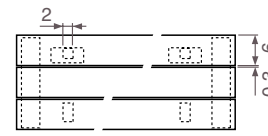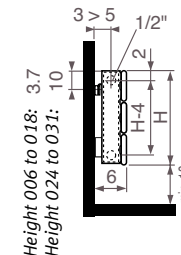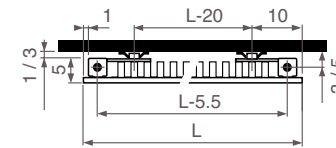

- standard connection
- variant


Non standard connections without surcharge

TYPE 22

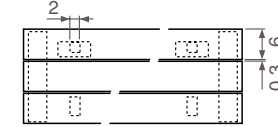
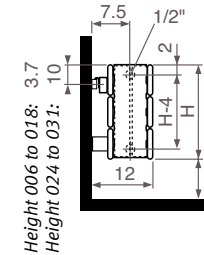
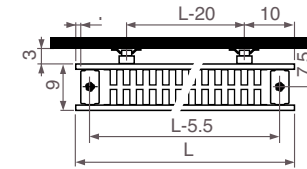


- standard connection
- variant

TYPE 22 GR with grille




TYPE 34

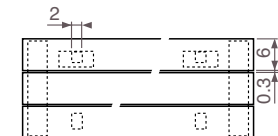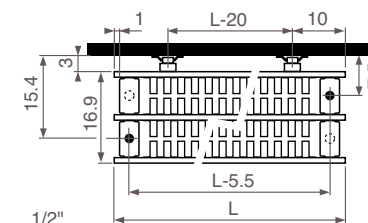

- standard connection
- variant

TYPE 34 GR with grille



Configurations on size: see parts.