



Energy
SAVERS
LOW-H₂O

MINI FREESTANDING

Strikingly discrete

- For spaces with large windows, glazed façades, for window displays, conservatories, under window seats and for dwarf walls.
- Discreet appearance with heights from 8cm.
- No wasteful heat loss from radiation through glazing.
- Stable one-piece casing.
- Suitable for integrated valve.
- Low-H₂O technology with super conductive and ultra fast heat exchanger for low energy consumption and maximum heat emission.
- Twin Power for better compensation of the downward cold air flow next to glazed façades or ventilation grilles.
- Safe surface temperature.
- **A 30 year guarantee** on the heat exchanger.

Also available as Mini wall mounted model for low window sills and dwarf walls. See page 48.

MINI FREESTANDING flaming red 111 (RAL 3000)



LOW-H₂O
SELECTED AS
THE MOST
ECONOMICAL
RADIATOR

MINI FREESTANDING



MINI FREESTANDING


EN 442

55 45


GUARANTEE
30
YEAR
HEAT EXCHANGER

DIMENSIONS (in cm)



HEIGHT 008

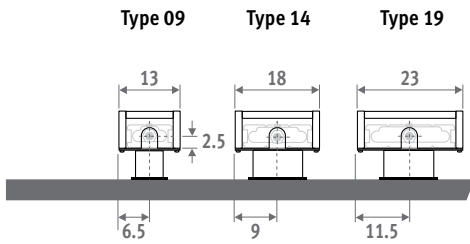

HEIGHT 013

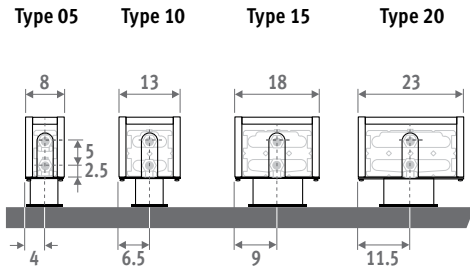

HEIGHT 023 / 028

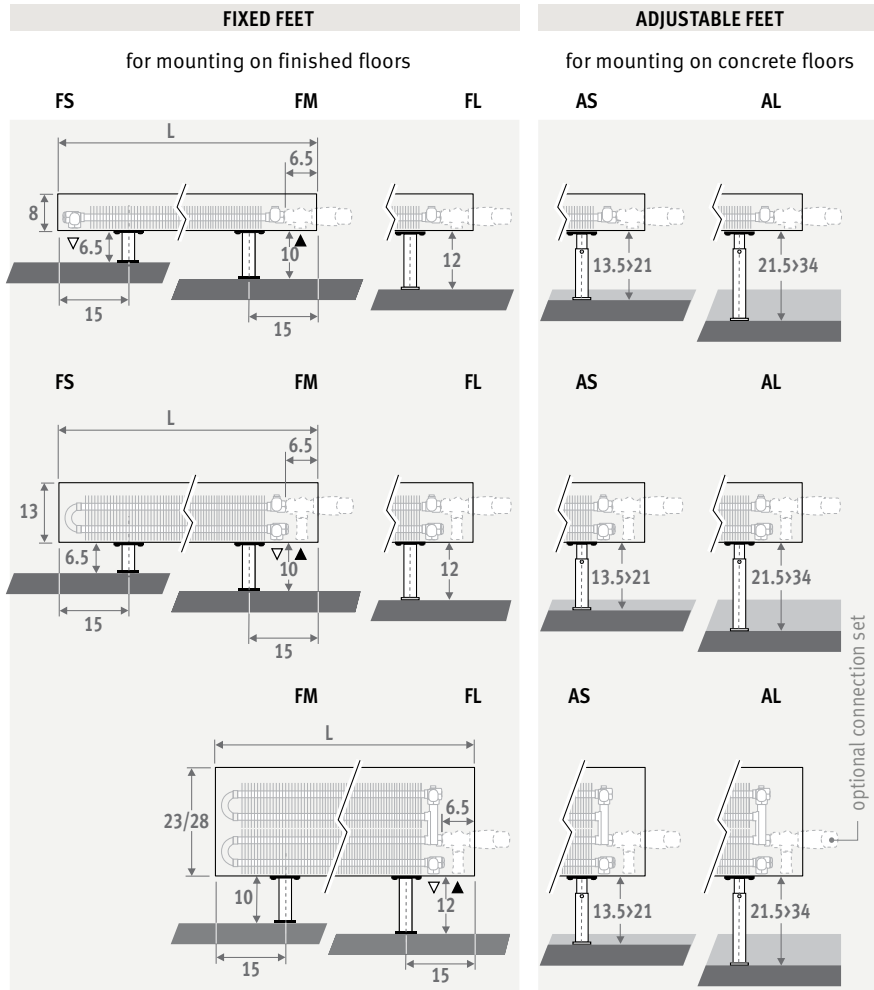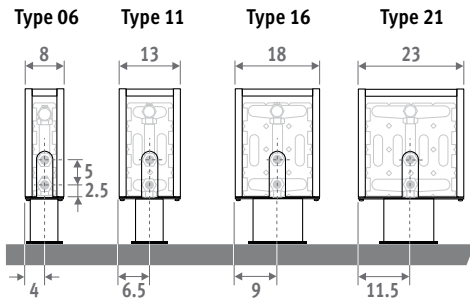

ORDERING CODE FIXED FEET

code height length type colour foot
MINF . 008 060 09 . XXX /XX
 fill in colour code
 FS: fixed feet, height 6.5 cm
 (only for height 008 and 013)
 FM: fixed feet, height 10 cm
 FL: fixed feet, height 12 cm

ORDERING CODE ADJUSTABLE FEET

code height length type colour foot
MINF . 008 060 09 . XXX /XX
 fill in colour code
 AS: adjustable feet, height from 13.5 to 21 cm
 AL: adjustable feet, height from 21.5 to 34 cm

Also available as Mini wall mounted model for low window sills and dwarf walls. See page 48.

DELIVERY


- Easy to install by one person.
 Standard delivery:
 - Low-H₂O heat exchanger, air vent 1/8" and drain plug 1/2"
 - casing in one piece for connection left or right
 - feet in the same colour as the radiator

COLOURS


- Environmentally friendly, scratch-resistant, high UV resistant powder coating.
 Standard colours:
 - traffic white RAL 9016 (133), soft touch lightly structured satin lacquer
 - sandblast grey (001), fine texture metallic lacquer
 Other colours: see colour chart.

CONNECTION

Standard connection:
 Height 008: opposite end connection, flow left or right
 Other heights: same end connection, left or right connection



It is not possible to connect to the wall from inside the casing, as the casing includes a closed rear panel.

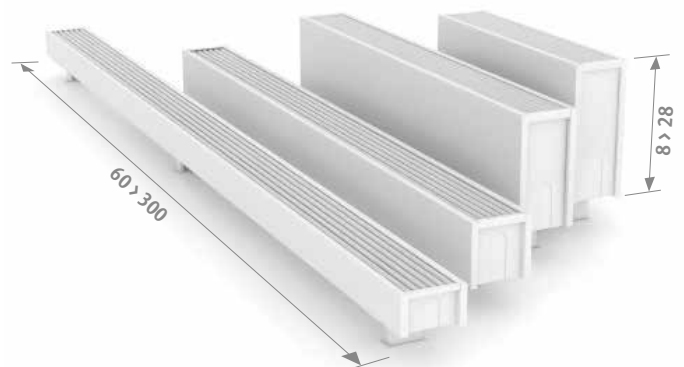




CONNECTION SETS

Jaga H-valve to the floor for Mini height 013/023/028 for one or two pipe

TRV head and sleeve couplings Eurocone 3/4" included.

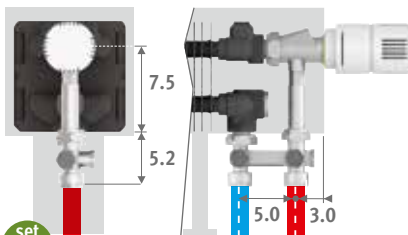

set
104

CODE 1-PIPE/2-PIPE

€



COLO.HBSF.JC.4...

82,50



COLO.HBSF.JW.4...

72,80

fill in sleeve coupling code

Precision metal tube 14/1 114

Precision metal tube 15/1 115

Precision metal tube 16/1 116

RPE/ALU tube 16/2 616

Jaga valve to the floor or Mini height 008

- with feet FS (H=6.5 cm):

Jaga valve 5090.4407, see page 153.

No lockshield possible on the return.



- with feet FM or FL (H=10 or 12 cm):

set 222, see page 145.

Other connections:

See chapter "Connection sets and valves" for all connection options and technical information.

FIXING SET FOR SHELF

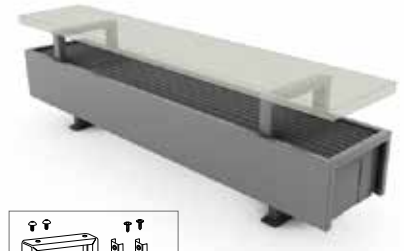

Number of sets for casing length:

- from 060 to 160 cm: min. 2 sets

- from 180 to 300 cm: min. 3 sets

Shelf not supplied.

CODE	for type	€/set st. colour	€/set other
5210.00015/XXX	14/15/16	49,20	59,00
5210.00020/XXX	19/20/21	49,20	59,00

fill in colour code

