



*Energy*  
**SAVERS**  
**LOW-H<sub>2</sub>O**

# MINI WALL

Strikingly discrete

- Extremely suited to spaces with large windows and for dwarf walls under window seats.
- Heights from 8cm
- Beautiful in combination with the free-standing Mini for glazed façades.
- Stable one-piece casing.
- Low-H<sub>2</sub>O technology with super conductive and ultra fast heat exchanger for low energy consumption and maximum heat emission.
- Twin Power for better compensation of the downward cold air flow next to glazed façades or ventilation grilles.
- Safe surface temperature.
- **A 30 year guarantee** on the heat exchanger.

Also available as freestanding model for glazed façades. See page 72.

MINI WALL sandblast grey (001)



LOW-H<sub>2</sub>O  
SELECTED AS  
THE MOST  
ECONOMICAL  
RADIATOR

MINI WALL




# MINI WALL MOUNTED MODEL




## DIMENSIONS (in cm)


### HEIGHT 008 (opposite end connections)

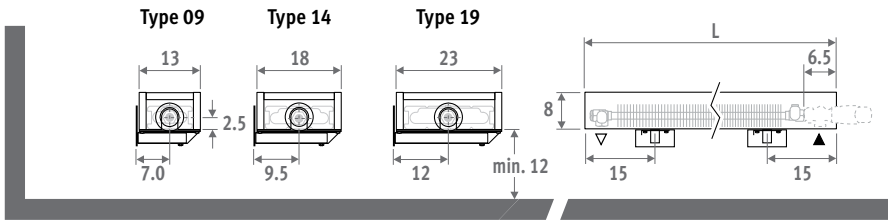

### HEIGHT 013

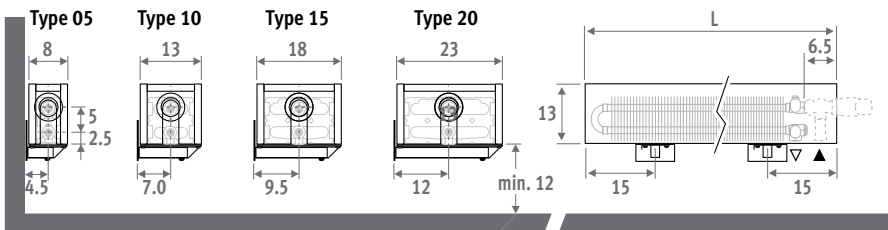


### HEIGHT 023 / 028

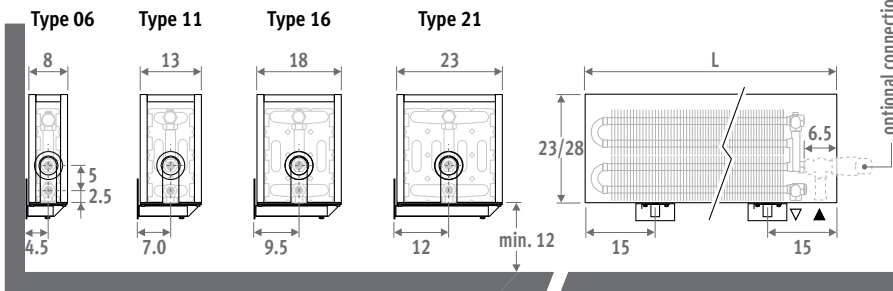

Also available as freestanding model for glazed façades. See page 72.

## ORDERING CODE

code	height	length	type	colour
MINW .	008	060	09 .	XXX
<i>fill in colour code</i>				

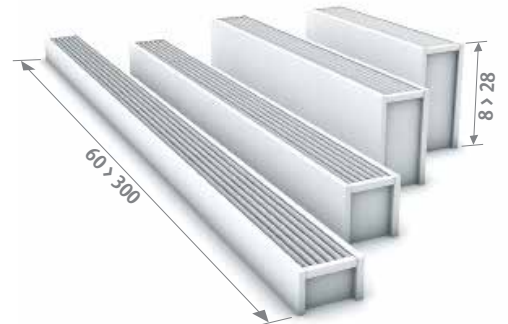

## DELIVERY

Easy to install by one person.

Standard delivery:

- Low-H<sub>2</sub>O heat exchanger, air vent 1/8" and drain plug 1/2"
- casing in one piece for connection left or right
- wall brackets in the same colour as the casing

## COLOURS

Environmentally friendly, scratch-resistant, high UV resistant powder coating.

Standard colours:

- traffic white RAL 9016 (133), soft touch lightly structured satin lacquer
- sandblast grey (001), fine texture metallic lacquer

Other colours: see colour chart.


## CONNECTION

Standard connection:

Height 008: opposite end connection, flow left or right

Other heights: same end connection, left or right connection.

It is not possible to connect to the wall from inside the casing, as the casing includes a closed rear panel.



## CONNECTION SETS

Mini height 013/023/028


**Connection to the floor:**

use set 104 (see page 136)

**Connection to the wall:**

Jaga H-valve for one or two pipe

TRV head and sleeve couplings Eurocone 3/4" included.

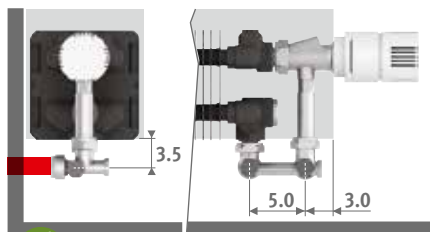

Set 103

CODE 1-PIPE/2-PIPE

€



COLO.HBSW.JC.4...

82,50



COLO.HBSW.JW.4...

72,80

*fill in sleeve coupling code*

Precision metal tube 14/1 **114**

Precision metal tube 15/1 **115**

Precision metal tube 16/1 **116**

RPE/ALU tube 16/2 **616**

## Other connections:

See chapter "Connection sets and valves" for all connection options and technical information

