



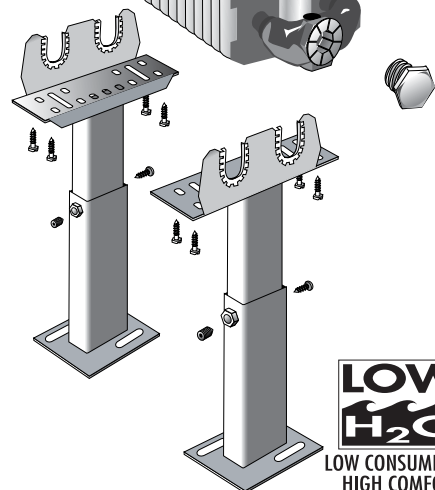

MINF - Mini Freestanding / MINW - Mini Wall



Montagehandleiding / Instructions de montage
Montagehinweis / Mounting instructions

Energy
SAVERS

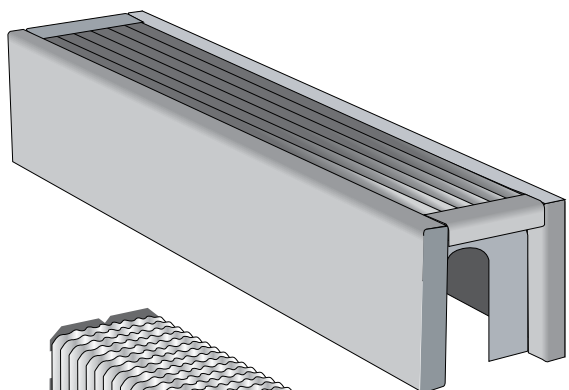



1

LOW
H₂O
LOW CONSUMPTION
HIGH COMFORT

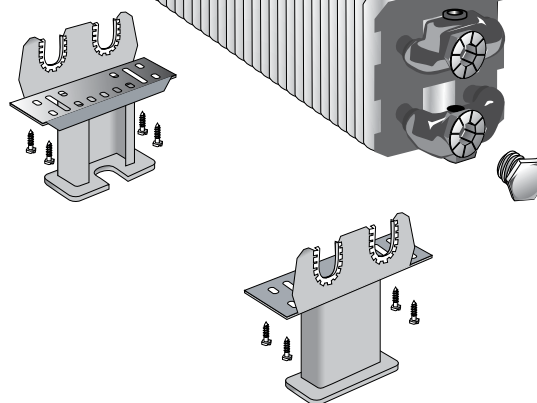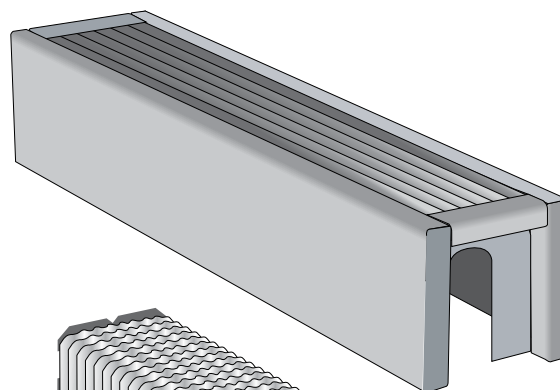


2

LOW
H₂O
LOW CONSUMPTION
HIGH COMFORT

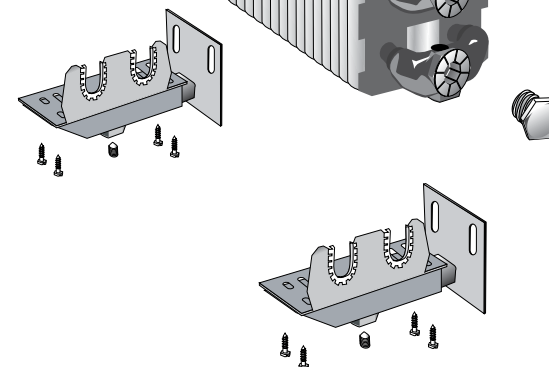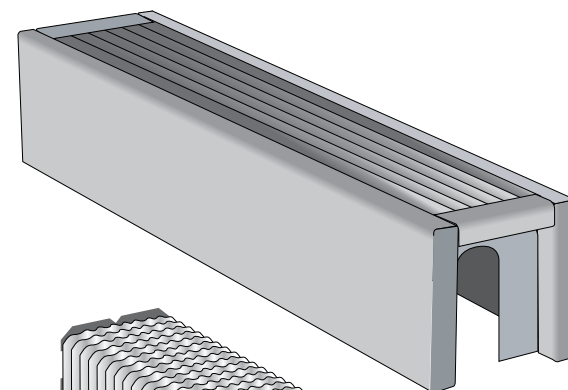

3

LOW
H₂O
LOW CONSUMPTION
HIGH COMFORT















AFMETINGEN VOOR AANSLUUITING MET JAGA THERMOSTAATVENTIEL
DIMENSIONS POUR RACCORDEMENT AVEC VANNE THERMOSTATIQUE JAGA
ABMESSUNGEN FÜR ANSCHLUSS MIT JAGA-THERMOSTATVENTIL
DIMENSIONS FOR CONNECTION WITH JAGA THERMOSTATIC VALVE

1

2

3

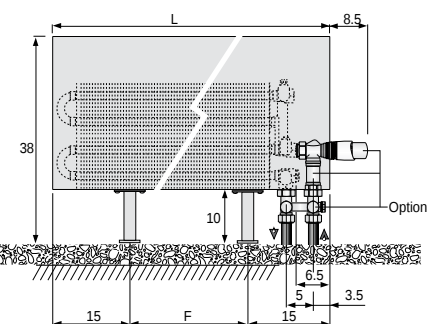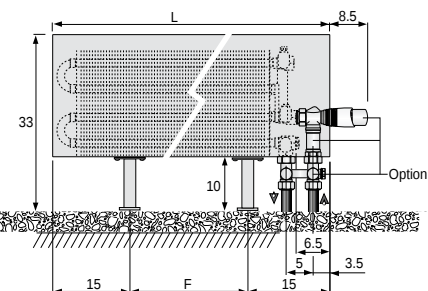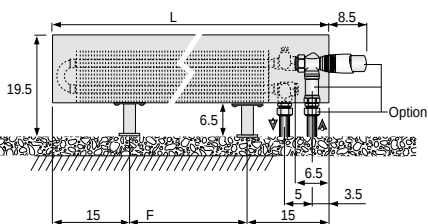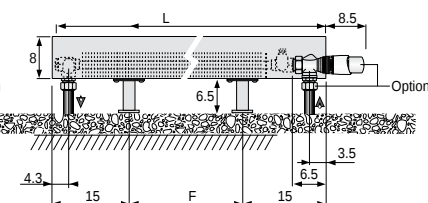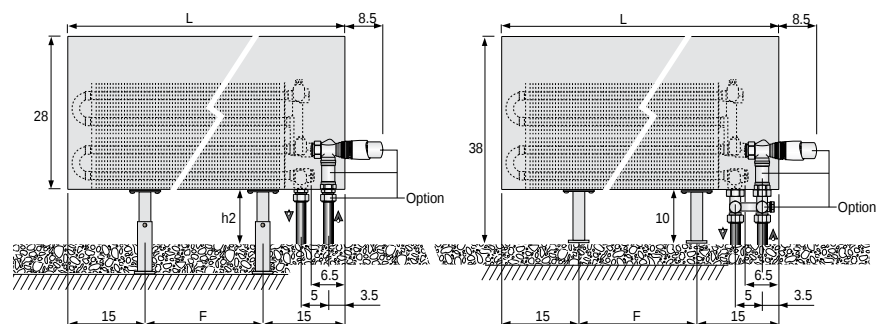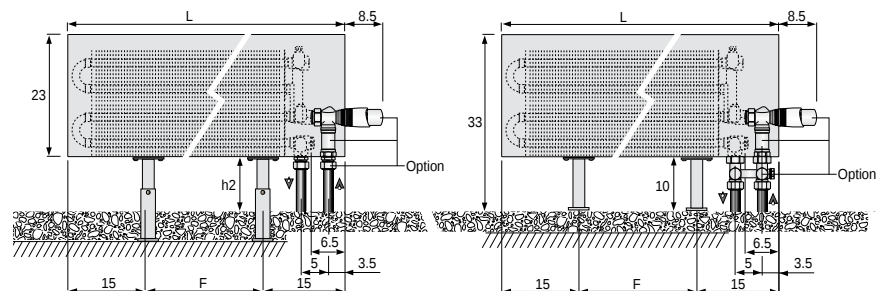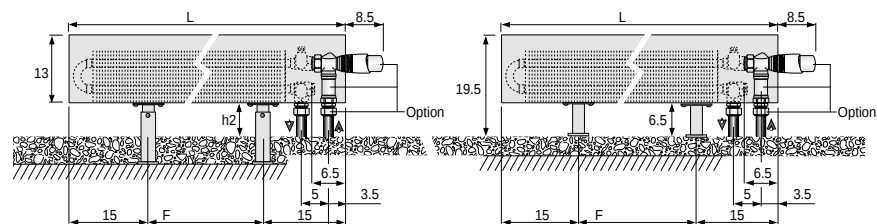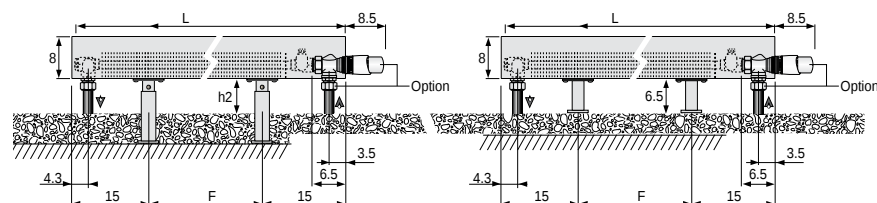

T	D	d	h1*	h2*
09	13	7	5	6.5
14	18	9.5	7	6.5
15	23	12	9	6.5

T	D	d	h1*	h2*
05	8	4.5	5	6.5
10	13	7	7	6.5
15	18	9.5	9	6.5
20	23	12	11	6.5

T	D	d	h1*	h2*
06	8	4.5	7	10
11	13	7	9	10
16	18	9.5	11	10
21	23	12	13	10

T	D	d	h1*	h2*
06	8	4.5	7	10
11	13	7	9	10
16	18	9.5	11	10
21	23	12	13	10

* Kleinere afstanden kunnen een lichte daling van de afgifte tot gevolg hebben.
 * Des dimensions inférieures peuvent diminuer légèrement l'émission de chaleur.
 * Kleinere Abstände verändern geringfügig die Wärmeabgabe.
 * Smaller dimensions can decrease output.

OPTIE_OPTION

VENTIELEN_VANNES_VENTILE_VALVES



code 5094.407



code 5094.405



code 5090.1104



code 5090.1111



code 5090.1110



code 5090.1119



code 5090.402



code 5090.105




code 5090.10501



code 5090.10502

L	60	70	80	90	100	110	120	140	160	180	200	220	240	260	280	300
F ±3mm	30	40	50	60	70	80	90	110	130	150	170	190	210	230	250	270
Aantal voeten / Nombre de pieds / Anzahl Füße / Number of feet	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3



AFMETINGEN VOOR AANSLUITING MET JAGA PRO / JAGA COMAP THERMOSTAATVENTIEL
DIMENSIONS POUR RACCORDEMENT AVEC VANNE THERMOSTATIQUE JAGA PRO / JAGA COMAP
ABMESSUNGEN FÜR ANSCHLUSS MIT JAGA PRO / JAGA COMAP THERMOSTATVENTIL
DIMENSIONS FOR CONNECTION WITH JAGA PRO / JAGA COMAP THERMOSTATIC VALVE

1

JAGA PRO

2





JAGA COMAP

3





JAGA PRO

3





JAGA COMAP

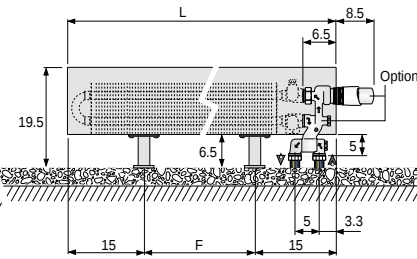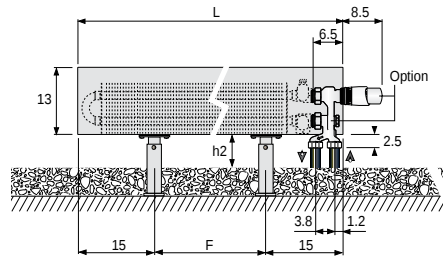

T	D	d	h1*	h2*
05	8	4.5	5	6.5
10	13	7	7	6.5
15	18	9.5	9	6.5
20	23	12	11	6.5

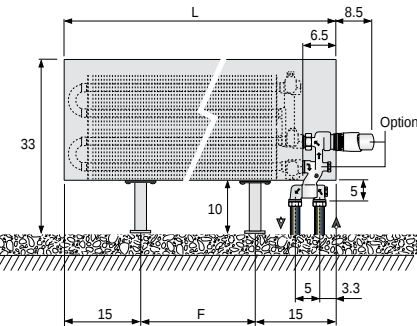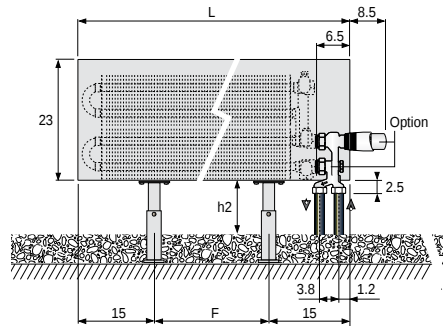

T	D	d	h1*	h2*
06	8	4.5	7	10
11	13	7	9	10
16	18	9.5	11	10
21	23	12	13	10

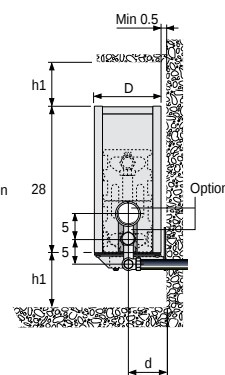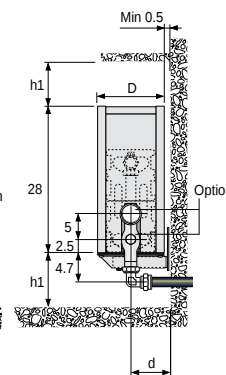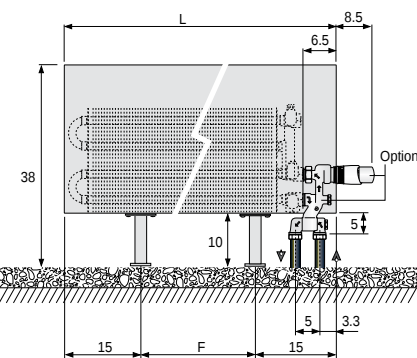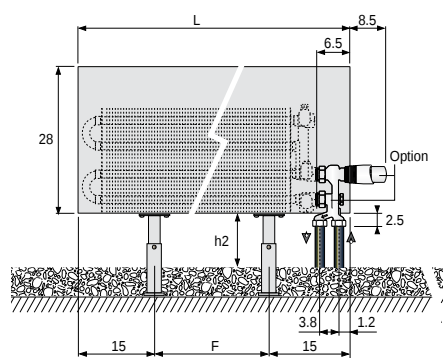

T	D	d	h1*	h2*
06	8	4.5	7	10
11	13	7	9	10
16	18	9.5	11	10
21	23	12	13	10

L	60	70	80	90	100	110	120	140	160	180	200	220	240	260	280	300
F 3mm	30	40	50	60	70	80	90	110	130	75	85	95	105	115	125	135
Aantal voeten / Nombre de pieds / Anzahl Füße / Number of feet	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3

OPTIE_OPTION

VENTIELEN_VANNES_VENTILE_VALVES



Jaga Pro 5094.414



Jaga Comap 5094.402



code 5090.1104



code 5090.1111

















code 5090.1110



code 5090.1119

- * Kleinere afstanden kunnen een lichte daling van de afgifte tot gevolg hebben.
- * Des dimensions inférieures peuvent diminuer légèrement l'émission de chaleur.
- * Kleinere Abstände verändern geringfügig die Wärmeabgabe.
- * Smaller dimensions can decrease output.

2

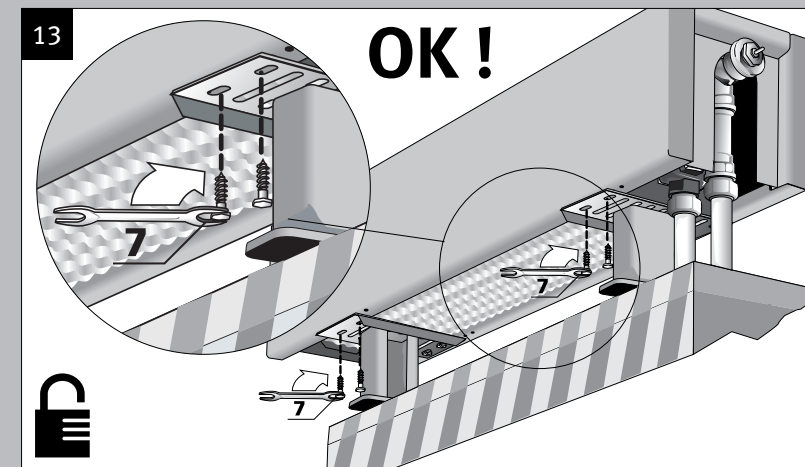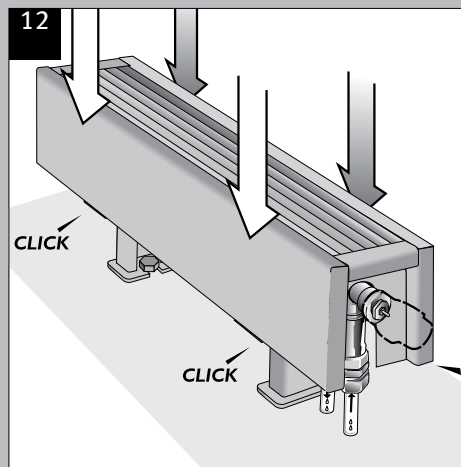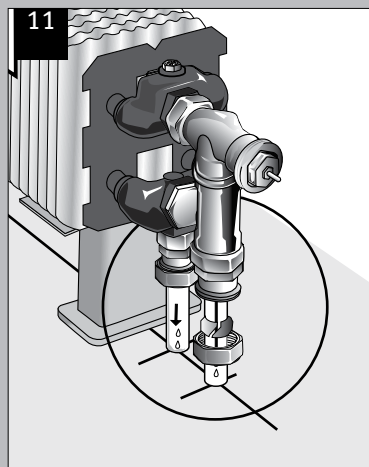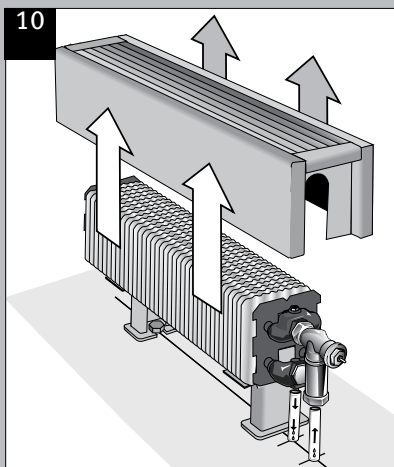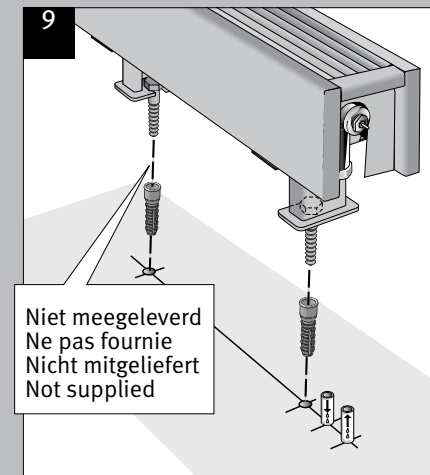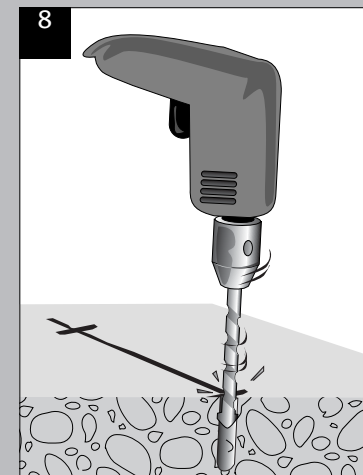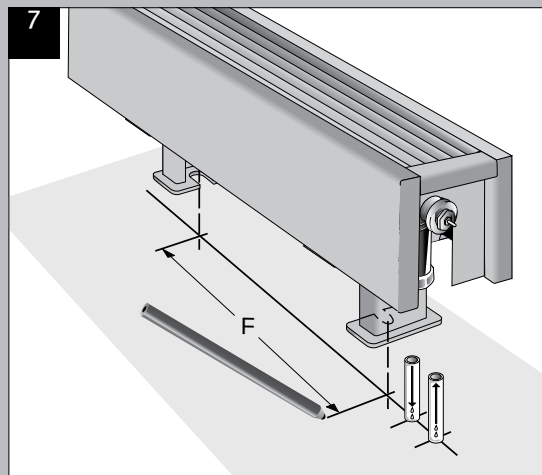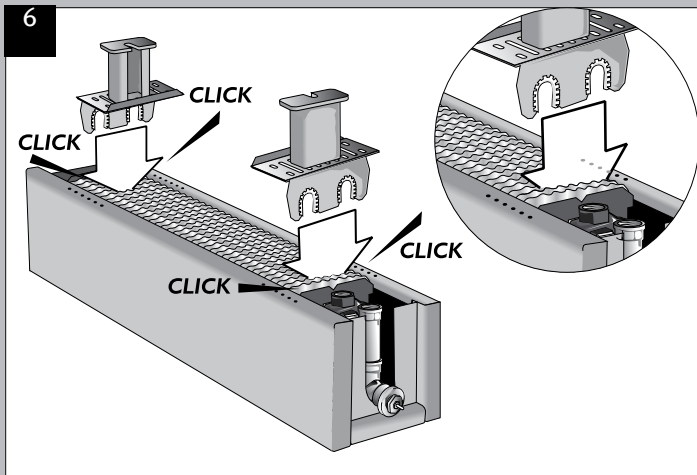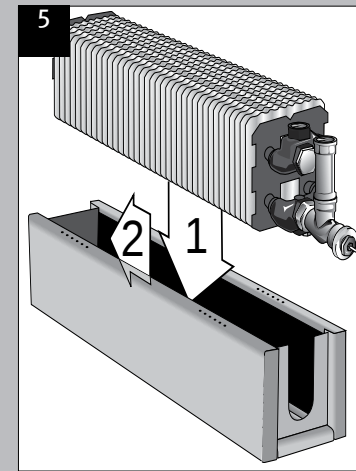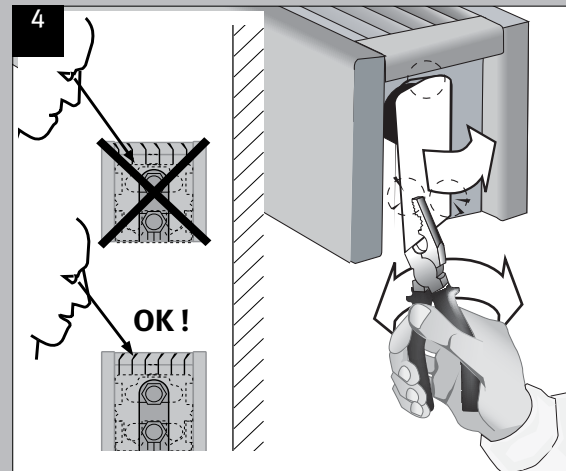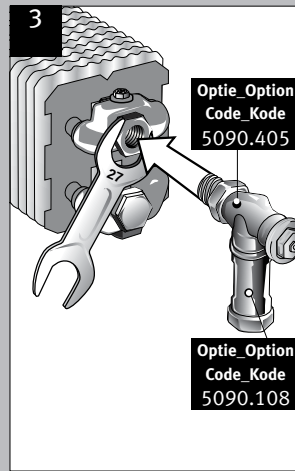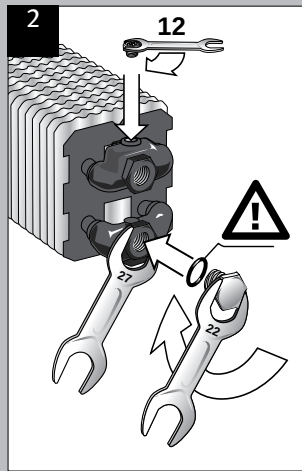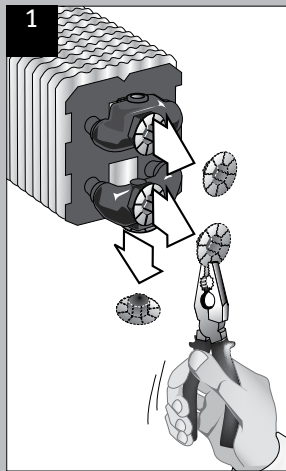

3

