




# Deco Panel



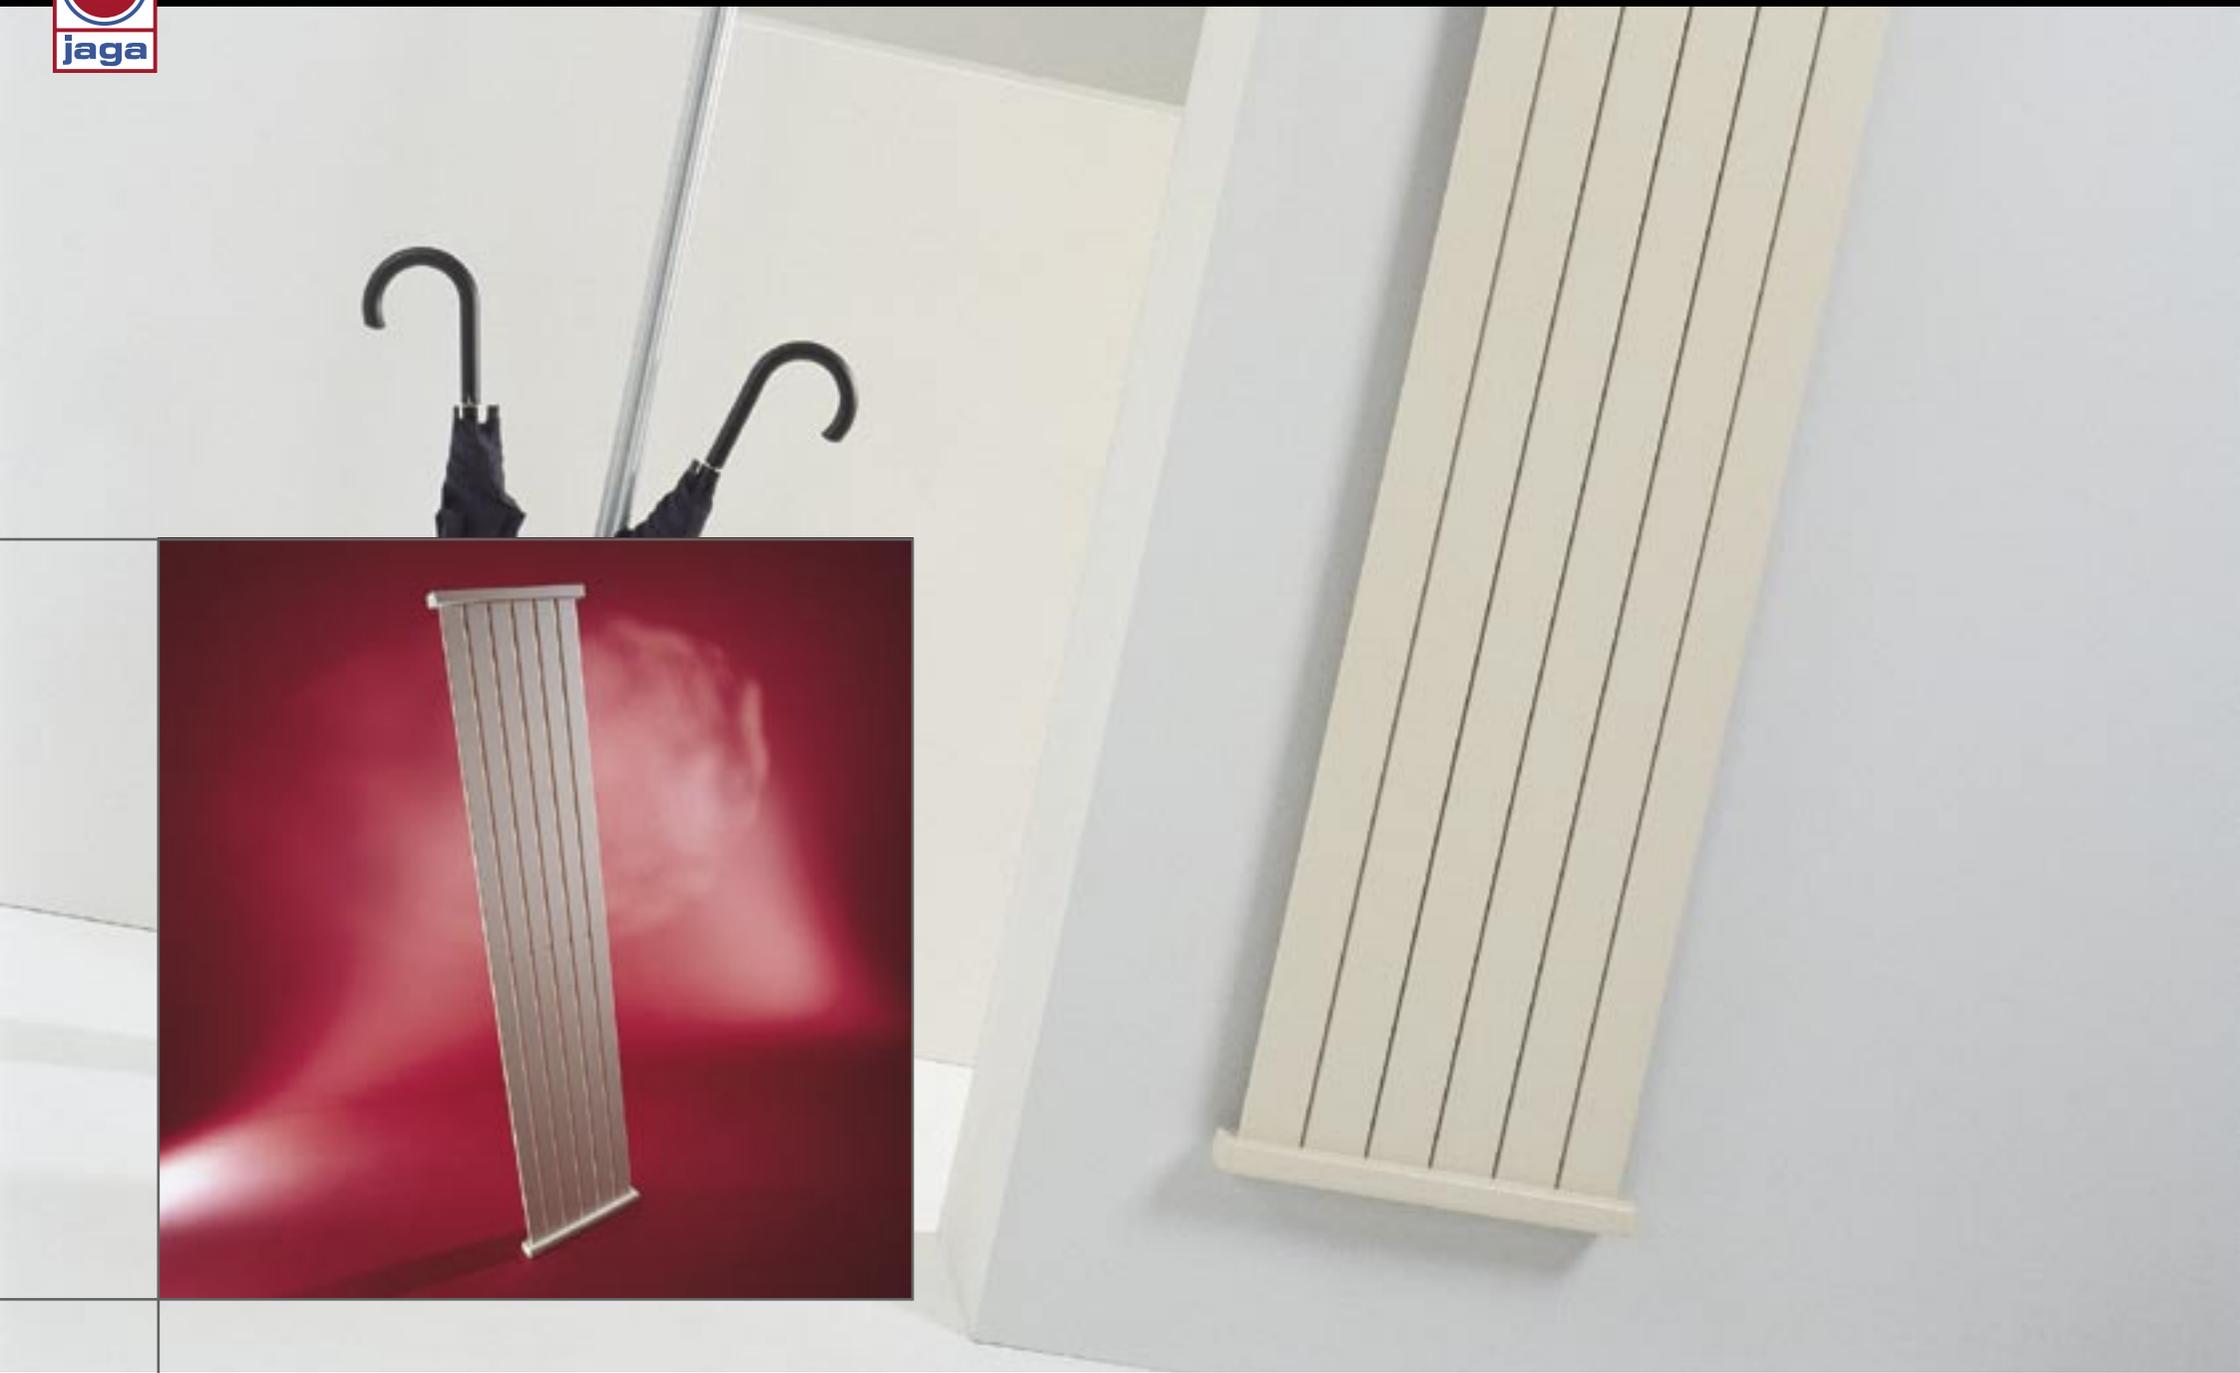

# Deco Panel

## RADIATED HEAT IN ITS MOST DECORATIVE FORM!

The stylish Jaga Deco radiators belong to a different class both technically and aesthetically. Its flexibility and range is the answer to the creative ideas of the designer combined with great space saving possibilities. Deco radiators: the convenient heating solution in both renovation or in new build construction.

The Deco-Panel is an elegant and functional heating panel which may be fitted in recesses, to the wall, etc...

Also available in a horizontal version.

## COLOURS

Standard colours:

- > white (233) RAL 9016 glossy
- > white (201) RAL 9010 glossy
- > sandblast grey metallic (001)

Other colours: see colour chart

## OPTION

### EXTENDED WALL FIXINGS (ONLY SUITABLE FOR PVSU)

The spacing from the backside of the collector and the wall is 3.5 cm instead of 1.5 cm.

Code 9092.50


Only possible with PVSU in combination with connection to the wall and with Deco-Pro valve.

Supplied free if the order code is specified along with the appliance code.

## DIMENSIONS


### PVSU

Panel Vertical Single Wall

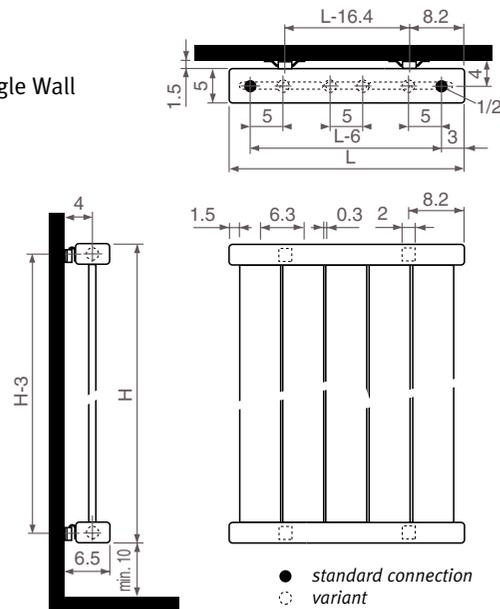


### PVDW

Panel Vertical Double Wall

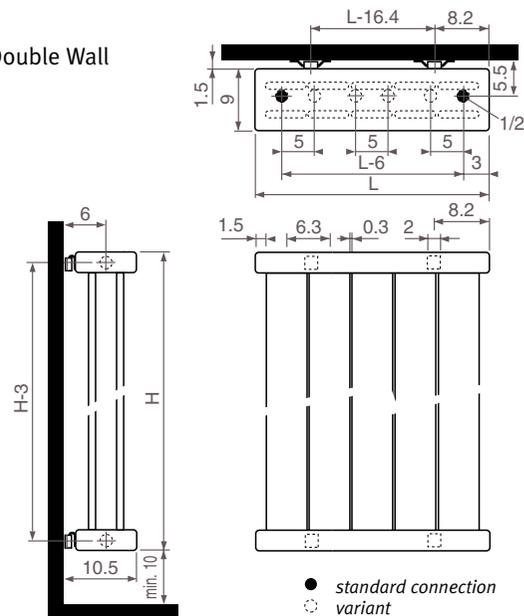

## CONNECTIONS

Code: 1° number = flow  
2° number = return



### STANDARD CONNECTION:

Code 18  
Connection 18 or 81

### CENTRAL CONNECTION:

Ordering code: specify code MM instead of 18. Flow left or right. (LL or RR is also possible)

### TOP END CONNECTION:

Ordering code: specify 45 or 54 instead of 18. Provide an air vent on the central heating tube.

### SIDE END CONNECTION:

Ordering code: specify 32, 67, 41 or 58 instead of 18. Code 32 or 67 not suitable for the perpendicular to the wall model. (PVSS/PVDS)

### CROSS-OVER CONNECTION

Ordering code: specify 51 or 48 instead of 18.


### ONE PIPE CONNECTION:

Ordering code: specify code 22 (left) or 77 (right) instead of 18. Always use a horizontal diffusion tube (ø 10 to 12mm) of min. length of 100mm and a reduction washer. Also possible with code MM and connection set 41 or 42.


Non standard connections without surcharge

## FIXINGS

### STANDARD WALL FIXING




### FOOT




### CEILING FIXING

The ceiling fixing is identical to the feet. It has however a length of 50 cm which can be adapted by the contractor on site.



### SIDE END FIXING

	PVSS	PVDS
A	2	3.7
B	4	6.8



Configurations on size: see parts. Non standard-fixings are welded to the radiator and cannot be changed or reordered afterwards.